DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE ACCESSORY · PRODUCT SPECIFICATION

R60 Channel Hanging Mount Kit

PART NO. **NL-AP-R60-HK**

2 steel ropes · 2 straight connectors with screws · ceiling suspension with power feed

SHOWN: KIT CONTENTS

PENDANT · 2-POINT



SPECIFICATIONS

KIT CONTENTS	2 steel ropes, 2 straight connectors with screws
USE WITH	R60 round pendant profile (NL-AP-R60-8') R40 round pendant profile (NL-AP-R40-8')
MOUNTING	Ceiling suspension, 2 hanging points; connectors screw into the top of the profile
POWER FEED	Through the two ropes: one negative (–), one positive (+)
HEIGHT	Set on site; connector locks onto the rope with a hex key

PRODUCT OVERVIEW

The **NL-AP-R60-HK** hangs a round pendant profile from the ceiling on **two steel ropes**. A **straight connector** on each rope screws into the top of the profile, and the ropes also carry the **LED power**: the power supply connects to the two ceiling connectors, so no separate cable runs down to the light. Order one kit per suspended profile.

COMPATIBLE PROFILES



R60 Round Pendant

NL-AP-R60-8'

Ø 60 mm · 8 ft or 2 m



R40 Round Pendant

NL-AP-R40-8'

Ø 40 mm · 8 ft

ORDERING INFORMATION

PART NUMBER

NL-AP-R60-HK

R60 Channel Hanging Mount Kit · 2 steel ropes, 2 straight connectors with screws


QTY (KITS)	PO #	PROFILE	PROJECT

FIXTURE TYPE / TAG	NOTES

Profiles, opal covers and end caps are ordered separately: see the NL-AP-R60-8' and NL-AP-R40-8' cut sheets.
Installation steps are on page 2. Mains wiring to the LED power supply must be done by a qualified electrician to local code.


R60 CHANNEL HANGING MOUNT KIT · INSTALLATION

Installation

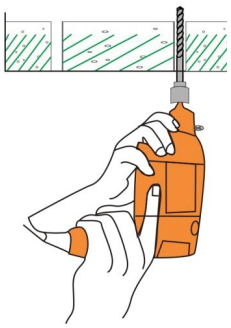


1 Drill the Ceiling

Drill a hole at each of the two hanging points.

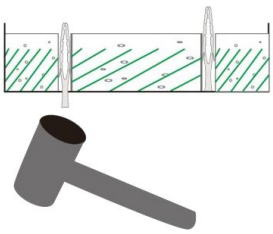


2 Fit the Wall Plugs

Tap a wall plug into each hole.

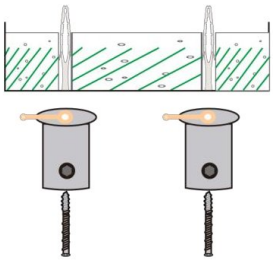


3 Fix the Ceiling Connectors

Screw a ceiling connector into each wall plug.

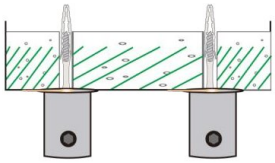


4 Check Both Connectors

Both ceiling connectors are fixed and ready for the ropes.

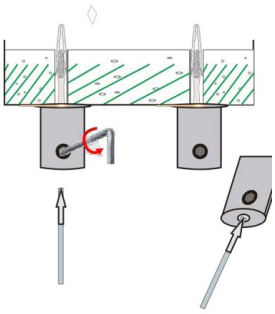


5 Fit the Steel Ropes

Push each steel rope up into its ceiling connector and lock it with the hex key.

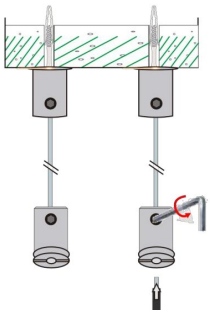


6 Set the Hanging Height

Slide a straight connector onto each rope at the height needed and lock it with the hex key.

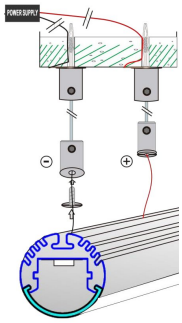

7 Wire and Fix the Profile


Connect the power supply – and + to the two ceiling connectors. Screw each straight connector into the top of the profile; take the + lead to the LED strip (see detail).

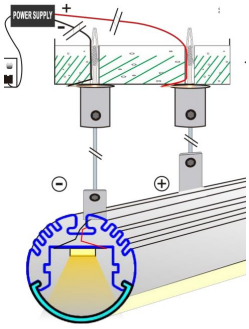

8 Finished

The profile hangs from the two ropes, and the LED strip is powered through them.

DETAIL: + LEAD TO THE LED STRIP (STEP 7)

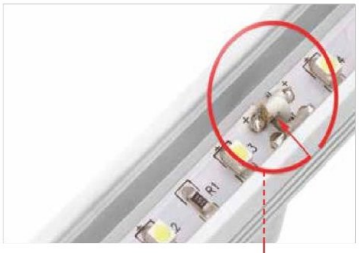

IMPORTANT

- The two steel ropes carry the LED power: one is negative (–), the other positive (+). Keep the polarity the same from the power supply to the LED strip.
- Mains wiring to the LED power supply must be done by a qualified electrician to local code.
- Switch off power before fitting or adjusting the ropes and connectors.
- Use one kit (2 ropes, 2 connectors) per suspended profile. Profiles, covers and end caps are ordered separately.