DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

3535 Square Profile

PART NO. **NL-AP-3535-2M**



SPECIFICATIONS


APPLICATION	Surface or pendant
MATERIAL	T5 anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Silver · Black / White (3 wk)
PC COVER	Frosted or Milky
LED STRIP	2 lines (recommended)
DIMENSIONS	35 × 35 mm (W × H)
MOUNTING	Clips, steel rope, connectors

PRODUCT OVERVIEW

The 3535 is a **square surface / pendant profile** designed to provide a uniform, linear light from **two lines of LED strip**. It offers various mounting options: surface clips, steel-rope suspension, and L, T and X connectors for continuous runs and shapes.

CROSS SECTION

Dimensions in mm



COMPONENTS & ACCESSORIES



Aluminum Profile
NL-AP-3535-2M
2 m · silver, black, white



PC Cover
Included
Frosted or milky




End Caps
NL-AP-C3535-C
Metal, with screws QTY



Mounting Clips
NL-AP-C3535
Metal, standard QTY

SURFACE MOUNT · WITH MOUNTING CLIPS

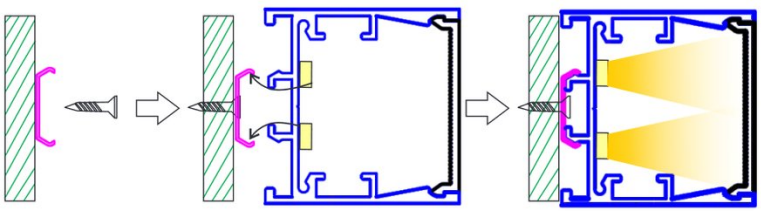

INSTALLATION · CONNECTORS & PENDANT ON PAGE 2

ORDERING INFORMATION

PART NUMBER — Includes PC cover
NL-AP-3535-2M

FINISH ☐ Silver ☐ Black ☐ White
COVER ☐ Frosted ☐ Milky

LENGTH ☐ 2 m std TOTAL _____ M
QTY _____ PO # _____
PROJECT _____

Specifications subject to change without notice.

DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · ACCESSORIES

Connectors & Installation

PART NO. **NL-AP-3535-2M**

CONNECTORS & SUSPENSION · ORDER SEPARATELY



L Connector

NL-AP-C3535-L

Corner run QTY



T Connector

NL-AP-C3535-T

Three-way join QTY



X Connector

NL-AP-C3535-X

Four-way join QTY



Hanging Mount Kit

NL-AP-R60-HK

Steel rope kit QTY



90° Connectors

Inquire

Inside / outside

L, T AND X CONNECTORS



L SHAPE




T SHAPE



X SHAPE









PENDANT · STEEL ROPE (NL-AP-R60-HK)







CONNECTOR INSTALLATION

1. Slide the connector halfway into the channel and lock with the supplied screws.
2. Slide the next channel section over the connector and tighten.
3. Fit the covers and end caps to complete the shape.

PENDANT INSTALLATION

1. Slide the suspension kit joiners into the alu base and rotate until locked in place.
2. Screw on the end caps.
3. Fix the top joiner to the ceiling and adjust the cable length to suit.

Specifications subject to change without notice.