DayTech LED


5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED PUCK LIGHT · PRODUCT SPECIFICATION

3W Frosted LED Puck Light

PART NO. **LED-DT300C-3 SERIES**

Frosted lens · 210 lm · 12V or 24V DC · CRI 90 · 120° beam · Dimmable · Recessed or surface mount

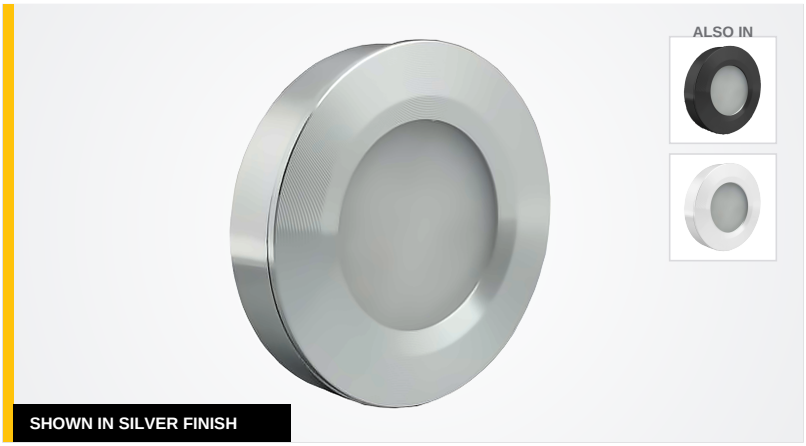

3 W POWER	**210 lm** LUMEN OUTPUT
12/24 V DC INPUT VOLTAGE	**90 CRI** COLOUR RENDERING
120° BEAM ANGLE	**ø70 mm** DIAMETER · 14 MM HIGH

FROSTED LENS · **DIMMABLE** · **12V OR 24V DC** · **RECESSED OR SURFACE** · **3 FINISHES**


cETLus LISTED

PRODUCT OVERVIEW

A slim **3W LED puck light** with a **frosted lens** for soft, even light in cabinets, shelving, display cases and millwork. Delivers **210 lumens** at **CRI 90** with a wide **120° beam**, on a **12V or 24V DC** supply. Dimmable; installs **recessed** in a ø65 mm cutout or **surface mounted**. Standard in warm and neutral white with a silver, black or white body. **Also available in 2700K or RGBW — please inquire.**

FRONT VIEW

Dimensions in mm



LENS
Frosted, round

BEAM
120°

CUTOUT
ø65 mm


SIZE
ø70 × 14 mm (H)

SPECIFICATIONS

SERIES	**LED-DT300C-3 (8 models)**
POWER	3 W
INPUT VOLTAGE	12 V DC or 24 V DC (-24V models)
LUMINOUS FLUX	210 lm
COLOUR TEMP.	WW 2800–3200K · NW 4000–4500K
SPECIAL ORDER	**2700K or RGBW — please inquire**
CRI	90
BEAM ANGLE	120°
LENS	Frosted
DIMMING	Dimmable
IP RATING	IP21
SIZE	ø70 mm × 14 mm (H)
CUTOUT	ø65 mm
FINISH	Silver · Black · White
INSTALLATION	Recessed or surface mount
CERTIFICATION	cETLus listed

SIDE VIEWS

PUCK · RECESSED

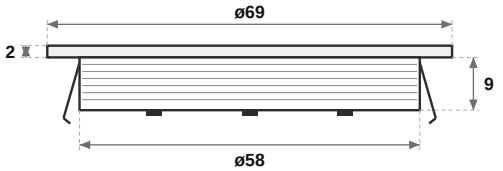

SURFACE MOUNT RING



Notch for cable exit

RECESSED CUTOUT ø65 MM

Specifications subject to change without notice.

DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED PUCK LIGHT · OPTIONS & ORDERING

Finishes & Ordering

PART NO. **LED-DT300C-3 SERIES**

8 standard models in warm or neutral white, 12V or 24V, three body finishes. Tick each model and enter a quantity.

BODY FINISH



SILVER

STANDARD

No suffix

Silver body · frosted lens



BLACK

-BLK

Part number suffix

Black body · frosted lens



WHITE

-WHT

Part number suffix

White body · frosted lens

COLOUR TEMPERATURE

WW Warm White
2800–3200K · standard

NW Neutral White
4000–4500K · standard

2700K / RGBW
AVAILABLE · INQUIRE

PART NUMBER KEY

LED-DT300C-3	+	WW / NW	+	none / -24V	+	none / -BLK / -WHT
SERIES · 3W FROSTED		COLOUR TEMP.		12V / 24V DC		SILVER / BLACK / WHITE

EXAMPLE
LED-DT300C-3WW-24V-BLK

ORDERING INFORMATION

ADD	PART NUMBER	COLOUR TEMPERATURE	VOLTAGE	FINISH	QTY
☐	**LED-DT300C-3WW**	Warm White · 2800–3200K	12V DC	Silver	
☐	**LED-DT300C-3WW-BLK**	Warm White · 2800–3200K	12V DC	Black	
☐	**LED-DT300C-3WW-WHT**	Warm White · 2800–3200K	12V DC	White	
☐	**LED-DT300C-3WW-24V**	Warm White · 2800–3200K	**24V DC**	Silver	
	LED-DT300C-3WW-24V-BLK	Warm White · 2800–3200K	**24V DC**	Black	
	LED-DT300C-3WW-24V-WHT	Warm White · 2800–3200K	**24V DC**	White	
☐	**LED-DT300C-3NW**	Neutral White · 4000–4500K	12V DC	Silver	
☐	**LED-DT300C-3NW-WHT**	Neutral White · 4000–4500K	12V DC	White	

All models 3W · 210 lm · CRI 90 · 120° · frosted · dimmable · cETLus — **TOTAL PUCKS**

ORDER DETAILS

COMPANY | CONTACT / PHONE | PO #

PROJECT | DATE REQUIRED | 2700K / RGBW INQUIRY / NOTES

POWER REQUIREMENT

Match the model to your supply: standard models run on **12V DC**, **-24V** models on **24V DC**. Size the power supply for the number of pucks (**3 W each**, allow ~20% headroom). Ordered separately.

Specifications subject to change without notice.