DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED PUCK LIGHT · PRODUCT SPECIFICATION

3W Adjustable Recessed Puck – CCT

PART NO. **LED-NL406 SERIES**

3-in-1 CCT · 210 lm · 24V DC · CRI 90 · 120° · Adjustable · Recessed · ø55 mm cutout




3 W POWER	**210 lm** LUMEN OUTPUT
24 V DC INPUT VOLTAGE	**3-IN-1** 3000K / 4000K / 6000K
90 CRI COLOUR RENDERING	**ø55 mm** CUTOUT

ADJUSTABLE · **3-IN-1 CCT** · **DIMMABLE** · **24V DC** · **RECESSED**

PRODUCT OVERVIEW

A recessed puck with an **adjustable** light head and **3-in-1 colour temperature**: a dip switch selects **3000K, 4000K or 6000K** on site. Delivers **210 lumens** at **CRI 90** with a 120° beam on **24V DC**. Dimmable; installs **recessed** in a ø55 mm cutout with spring clips. Available in **silver, white or black**.

FRONT VIEW



HEAD
Adjustable

CCT
3K / 4K / 6K dip switch

CUTOUT
ø55 mm


SIZE
ø68 × 23 mm (H)

SPECIFICATIONS

SERIES	**LED-NL406 (3 models)**
POWER	3 W
INPUT VOLTAGE	24 V DC
LUMINOUS FLUX	210 lm
COLOUR TEMP.	CCT tunable 3000K / 4000K / 6000K (dip switch)
CRI	90
BEAM ANGLE	120°
ADJUSTABLE	Yes
DIMMING	Dimmable
IP RATING	IP21
SIZE	ø68 mm × 23 mm (H)
CUTOUT	ø55 mm
FINISH	Silver · White · Black
INSTALLATION	Recessed

DIMENSIONS

Dimensions in mm

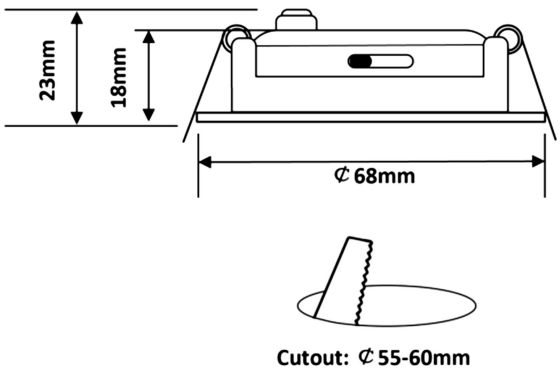

RECESSED CUTOUT ø55 MM

Specifications subject to change without notice.

DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

Options & Ordering

PART NO. **LED-NL406 SERIES**

3 models: 1 colour temperature × 3 body colours, 24V DC only. Tick each part number you need and enter a quantity.

FINISH



SILVER

STANDARD

No suffix



WHITE

-WHT

Part number suffix



BLACK

-BLK

Part number suffix

PART NUMBER KEY

LED-NL406	+	3 CCT	+	-24V	+	none / -WHT / -BLK
SERIES		WATTS + COLOUR TEMP.		24V DC		FINISH

EXAMPLE
LED-NL406-3CCT-24V-WHT

ORDERING INFORMATION

COLOUR TEMP. · 24V DC	SILVER no suffix	WHITE -WHT	BLACK -BLK
CCT Tunable 3000K + 4000K + 6000K · dip	LED-NL406-3CCT-24V QTY	LED-NL406-3CCT-24V-WHT QTY	LED-NL406-3CCT-24V-BLK QTY

All models 3W · 210 lm · 3K/4K/6K dip switch · CRI 90 · 120° · adjustable · ø55 mm cutout

TOTAL PUCKS

ORDER DETAILS

COMPANY

CONTACT / PHONE

PO #

PROJECT

DATE REQUIRED

NOTES

POWER REQUIREMENT

Runs on **24V DC** only. Size the power supply for the number of fixtures (**3 W each**, allow ~20% headroom). Power supply ordered separately.

Specifications subject to change without notice.