DayTech LED


5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED PUCK LIGHT · PRODUCT SPECIFICATION

1.4W Slim Puck Light – 24V

PART NO. **LED-NL408 SERIES**

120 lm · 24V DC · CRI 90 · 120° · Dimmable · Recessed or surface mount · ø60 mm cutout

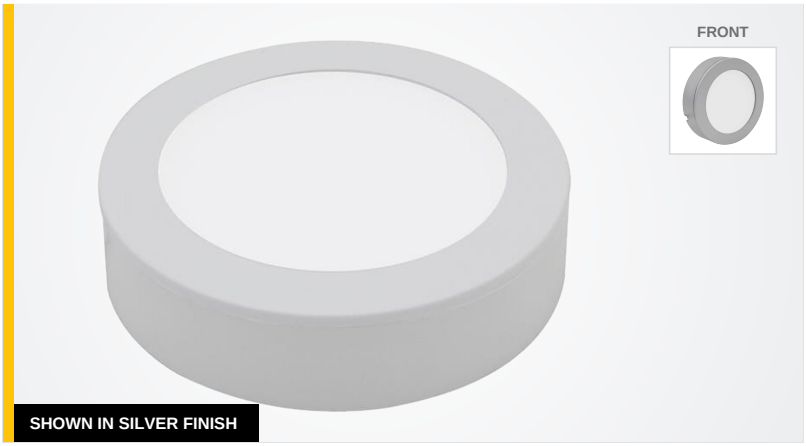

1.4 W POWER	**120 lm** LUMEN OUTPUT
24 V DC INPUT VOLTAGE	**90 CRI** COLOUR RENDERING
ø68 mm DIAMETER · 17 MM HIGH	**ø60 mm** CUTOUT

LOW 1.4W · **24V DC** · **CRI 90** · **DIMMABLE** · **RECESSED OR SURFACE**

cETLus LISTED

PRODUCT OVERVIEW

A low-wattage **1.4W, 24V** slim puck for soft accent light inside cabinets and display cases. Delivers **120 lumens** at **CRI 90** with a 120° beam. Dimmable; installs **recessed** in a ø60 mm cutout or **surface mounted**. Five colour temperatures from **2700K to 6000K**, in **silver or white**.

SURFACE RING & HOUSING



MOUNT
Recessed or surface

INPUT
24V DC


CUTOUT
ø60 mm

SIZE
ø68 × 17 mm (H)

SPECIFICATIONS

SERIES	**LED-NL408 (10 models)**
POWER	1.4 W
INPUT VOLTAGE	24 V DC
LUMINOUS FLUX	120 lm
COLOUR TEMP.	EW 2700K · WW 3000K · NW 4000K · DW 5000K · W 6000K
CRI	90
BEAM ANGLE	120°
DIMMING	Dimmable
IP RATING	IP21
SIZE	ø68 mm × 17 mm (H)
CUTOUT	ø60 mm
FINISH	Silver · White
INSTALLATION	Recessed or surface mount
CERTIFICATION	cETLus listed

DIMENSIONS

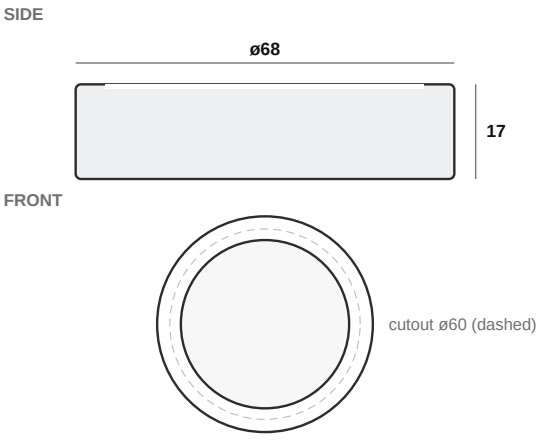

RECESSED CUTOUT ø60 MM

Specifications subject to change without notice.

DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

Options & Ordering

PART NO. **LED-NL408 SERIES**

10 models: 5 colour temperatures × 2 body colours, 24V DC only. Tick each part number you need and enter a quantity.


FINISH



SILVER

STANDARD

No suffix



WHITE

-WHT

Part number suffix

PART NUMBER KEY

LED-NL408	+	1.4 EW / WW / NW / DW / W	+	-24V	+	none / -WHT
SERIES		WATTS + COLOUR TEMP.		24V DC		FINISH

EXAMPLE
LED-NL408-1.4NW-24V-WHT

ORDERING INFORMATION

COLOUR TEMP. · 24V DC	SILVER no suffix	WHITE -WHT
EW Extra Warm White 2700K	LED-NL408-1.4EW-24V QTY	LED-NL408-1.4EW-24V-WHT QTY
WW Warm White 3000K	LED-NL408-1.4WW-24V QTY	LED-NL408-1.4WW-24V-WHT QTY
NW Neutral White 4000K	LED-NL408-1.4NW-24V QTY	LED-NL408-1.4NW-24V-WHT QTY
DW Daylight White 5000K	LED-NL408-1.4DW-24V QTY	LED-NL408-1.4DW-24V-WHT QTY
W Cool White 6000K	LED-NL408-1.4W-24V QTY	LED-NL408-1.4W-24V-WHT QTY

All models 1.4W · 120 lm · 24V DC · CRI 90 · 120° · dimmable · ø60 mm cutout · cETLus

TOTAL PUCKS

ORDER DETAILS

COMPANY

CONTACT / PHONE

PO #

PROJECT

DATE REQUIRED

NOTES

POWER REQUIREMENT

Runs on **24V DC** only. Size the power supply for the number of fixtures (**1.4 W each**, allow ~20% headroom). Power supply ordered separately.

Specifications subject to change without notice.