
DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

1576 Plaster-In Wall Washer

PART NO. **NL-AP-1576-2M**

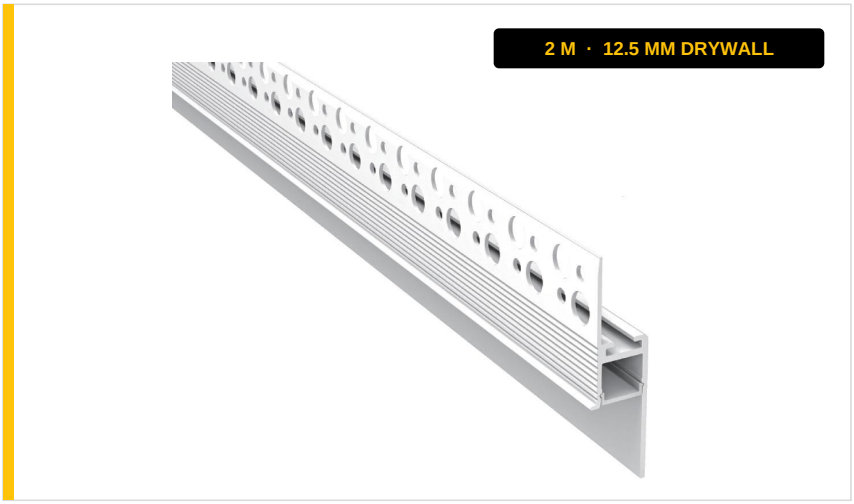

SPECIFICATIONS


APPLICATION	Wall washer, 1/2" drywall
MATERIAL	6063-T5 anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Silver
PC COVER	Frosted, 85% (included)
LED STRIP	Up to 2 × 10 mm strips
DIMENSIONS	76.1 × 14.8 mm (W × H)
IP RATING	IP20 · –30 °C to +100 °C
MOUNTING	Adhesive or screws, plastered
ACCESSORIES	End caps NL-AP-1576-C

PRODUCT OVERVIEW

The 1576 is a **plaster-in wall-washer profile** for **12.5 mm (1/2") drywall**. Set into the ceiling beside a wall, it washes light down the wall surface; once taped, mudded and painted it leaves a clean line of light with **no visible aluminum**. Holds up to **two 10 mm LED strips** behind a frosted PC cover.

CROSS SECTION

Dimensions in mm

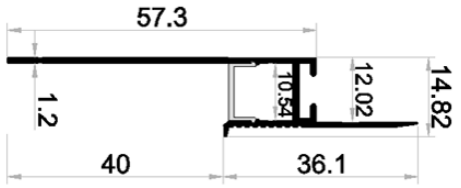

COMPONENTS




Aluminum Profile
2 m · silver



End Caps
NL-AP-1576-C QTY



PC Diffuser Cover
Frosted, 85% transmittance

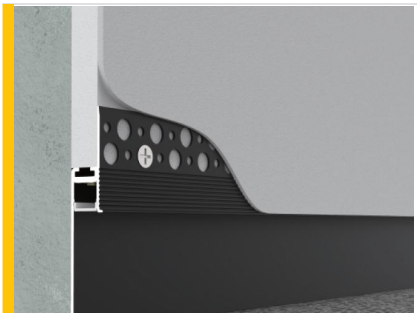

CEILING · WASHES WALL



TAPE, MUD & PAINT

Fix with adhesive or screws, apply drywall mesh over the flange, fill, sand and paint for a trimless finish.

INSTALLATION · PLASTER-IN, 12.5 MM DRYWALL

ORDERING INFORMATION

PART NUMBER — Includes frosted PC cover

NL-AP-1576-2M

FINISH	☐ Silver (Only finish)	COVER	Frosted (Included)
LENGTH	☐ 2 m std	TOTAL	M
QTY		PO #	
PROJECT			