
DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

2208 Low-Profile Channel

PART NO. **NL-AP-2208-2M**

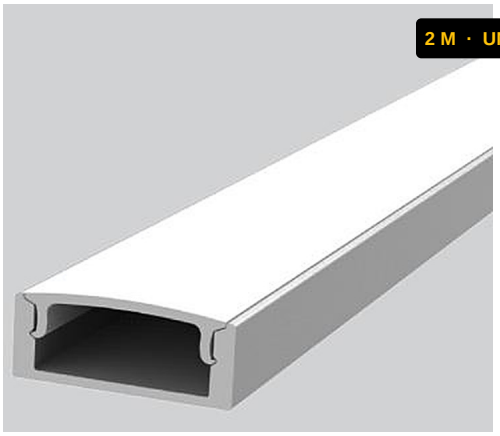

SPECIFICATIONS

APPLICATION	Surface mount, under cabinet
MATERIAL	AL6063 anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Silver
COVER	Frosted PC diffuser (included)
LED STRIP	1 line (recommended)
DIMENSIONS	22 mm wide × 8.5 mm high
MOUNTING	Clips or double-sided tape

PRODUCT OVERVIEW

The 2208 is a **low-profile surface channel** designed for **under-cabinet** lighting. It houses one line of LED strip behind a frosted diffuser for a uniform, sleek and minimalist line of light. The channel is wide enough to house 8mm or 10mm LED strip as well as splice connectors inside of the channel housing.

CROSS SECTION

Dimensions in mm



COMPONENTS & ACCESSORIES



Aluminum Profile
NL-AP-2208-2M
2 m · silver

Frosted Cover
Included
Frosted PC diffuser




End Caps
NL-AP-2208-C QTY
Closes profile ends



Mounting Clips
NL-AP-C2208 QTY
Clip-in surface mount

SURFACE MOUNT · WITH MOUNTING CLIPS

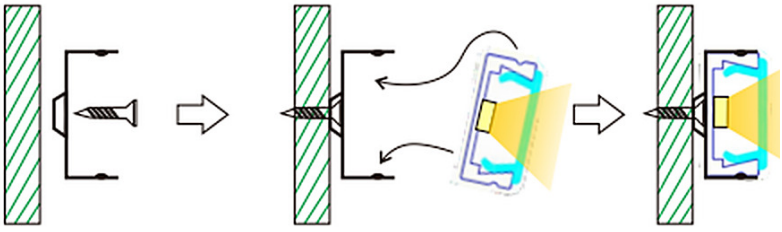

INSTALLATION GUIDE · SEE PAGE 2

ORDERING INFORMATION

PART NUMBER — Includes frosted cover
NL-AP-2208-2M

FINISH ☐ Silver (Only finish) | COVER Frosted (Included)

LENGTH ☐ 2 m std | TOTAL _____ M

QTY _____ | PO # _____

PROJECT _____

Specifications subject to change without notice.

DayTech LED
5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com


LED ALUMINUM PROFILE · INSTALLATION

Installation Guide


PART NO. **NL-AP-2208-2M**

SURFACE MOUNT · WITH MOUNTING CLIPS

1, With clip

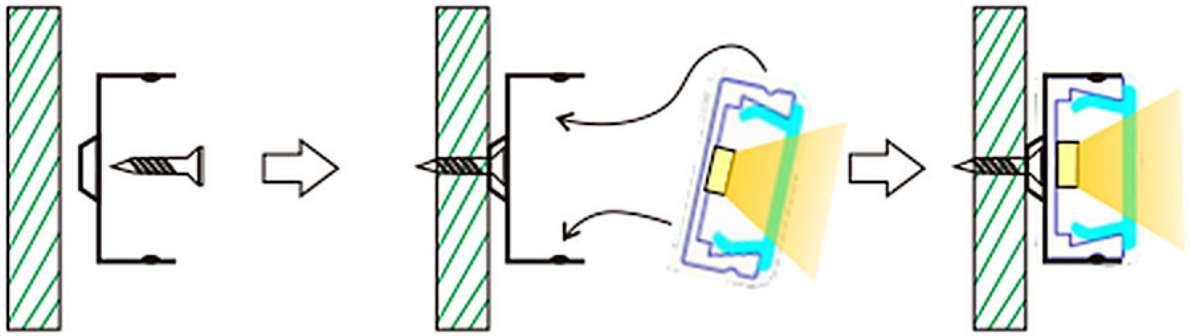

2, With double-sided tap

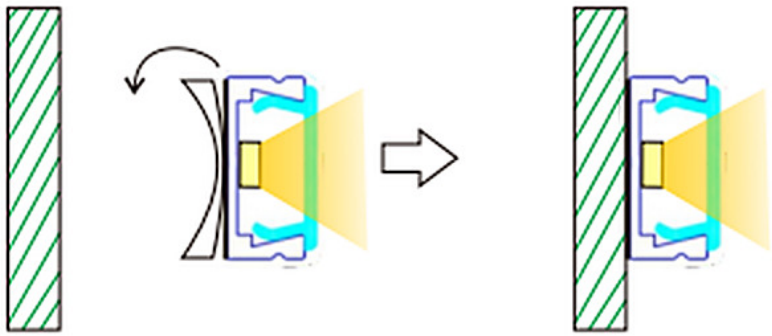

OPTION 1 · WITH CLIPS (NL-AP-C2208)

1. Screw the mounting clips to the underside of the cabinet, evenly spaced.
2. Install the LED strip in the channel and snap on the frosted cover.
3. Fit the end caps (NL-AP-2208-C) and press the channel into the clips.

OPTION 2 · WITH DOUBLE-SIDED TAPE

1. Clean the mounting surface so it is dry and free of dust.
2. Install the LED strip, fit the frosted cover and end caps.
3. Apply double-sided tape to the channel back and press firmly in place.

Specifications subject to change without notice.