
DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

2506 Flush-Mount Profile

PART NO. **NL-AP-2506-3M**

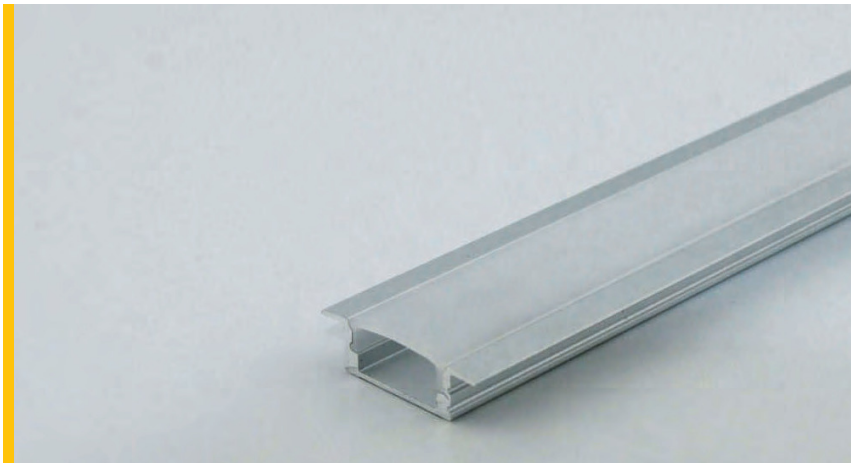

SPECIFICATIONS


APPLICATION	Recessed, snap-in flush mount
MATERIAL	Anodized aluminum
STANDARD LENGTH	3 m
PROFILE FINISH	Silver or Black
COVER	Frosted diffuser (included)
LED STRIP	Up to 12 mm wide
DIMENSIONS	25 × 7.8 mm (flange W × H)
IP RATING	IP33

PRODUCT OVERVIEW


The 2506 is a **snap-in, flush-mount** anodized aluminum profile with diffuser. Its 25 mm flange sits flush with the mounting surface for a clean, recessed line of light, housing LED strip up to 12 mm wide.

CROSS SECTION


Dimensions in mm



COMPONENTS



Aluminum Profile
3 m · silver or black



End Caps
NL-AP-2506-C QTY



Mounting Clips
NL-AP-C2506 QTY


INCLUDED



Frosted

Diffuser Cover
Frosted diffuser

RECESSED · SNAP-IN WITH MOUNTING CLIPS

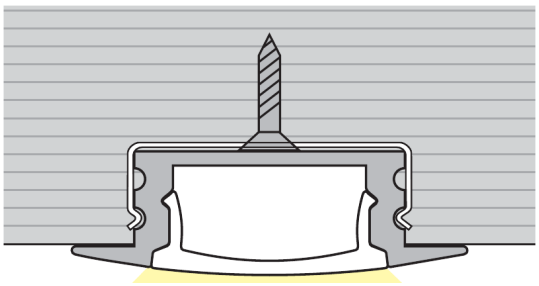

INSTALLATION GUIDE

ORDERING INFORMATION

PART NUMBER — Includes cover

NL-AP-2506-3M

FINISH ☐ Silver ☐ Black — COVER Frosted, Included

LENGTH ☐ 3 m std — TOTAL _____ M

QTY _____ — PO # _____

PROJECT _____

Specifications subject to change without notice.