DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

2519 IP67 Waterproof Profile

PART NO. **NL-AP-2519-2M-BLK**



SPECIFICATIONS


APPLICATION	Surface / suspension, wet
MATERIAL	Anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Black
DIFFUSER	IP67 silicone insert, frosted
LED STRIP	1 line, 8 or 10 mm
INNER WIDTH	17 mm
DIMENSIONS	25 × 19.3 mm (W × H)
IP RATING	IP67
ACCESSORIES	NL-AP-2519-C, NL-AP-2519-FB

PRODUCT OVERVIEW


The 2519 is a **slim, surface-mounted IP67 profile** designed specifically for **wet-area** applications. A silicone insert with built-in diffuser seals the LED strip inside the black aluminum housing, giving a uniform, linear light, a sleek look with sharp lines, and superior protection from the elements.

CROSS SECTION


Dimensions in mm

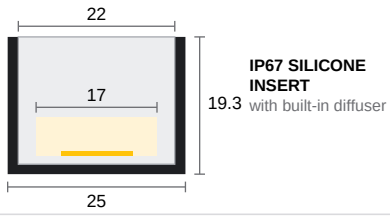

COMPONENTS



Aluminum Profile
2 m · black




End Caps
NL-AP-2519-C QTY



Flat Bar Heat Sink
NL-AP-2519-FB QTY



IP67 Silicone Insert
Built-in frosted diffuser

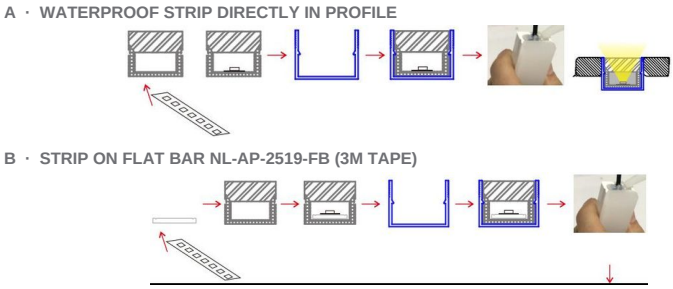

INSTALLATION · INSERT STRIP, THEN PRESS IN SILICONE INSERT

ORDERING INFORMATION

PART NUMBER — Includes IP67 silicone insert

NL-AP-2519-2M-BLK

FINISH	■ Black (Only finish)	INSERT	Silicone, frosted (Included)
LENGTH	☐ 2 m std	TOTAL	M
QTY		PO #	
PROJECT			

Specifications subject to change without notice.