DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

3311 Flexible Tile-In Profile

PART NO. **NL-AP-3311-2M-FLEX**



SPECIFICATIONS


INSTALLATION	Recessed tile-in or surface
FORM FACTOR	Flexible, bendable
MATERIAL	6063-T5 aluminum alloy
SURFACE FINISH	Anodized / powder coated
PROFILE FINISH	Silver, White or Black
DIFFUSER	Opal silicone
INTERNAL WIDTH	10.5 mm
DIMENSIONS	33 × 11 mm (W × H)

PRODUCT OVERVIEW


The 3311 is a **flexible, tile-in** aluminum channel that bends to follow curved walls, ceilings and coves. Its flange is set behind tile or plaster for a trimless line of light. Pair with **FL-300WW-5M-BD-24V** bendable tape for curves.

CROSS SECTION

Dimensions in mm

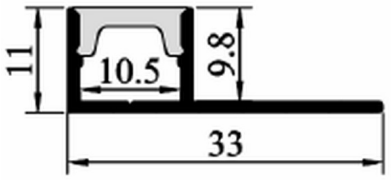

COMPONENTS



Flexible Profile
2 m length



End Caps
Pair, standard


Silicone Diffuser
Opal, flexible

RECOMMENDED



FL-300WW-5M-BD-24V
Bendable zig-zag tape

RECESSED (TILE-IN) OR SURFACE MOUNT

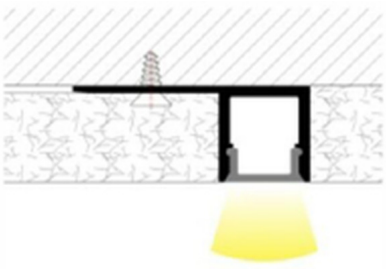

FOR CURVED RUNS

Recessed or surface mount. Tile-in recessed as shown, or surface mounted on curved walls and ceilings where recessing isn't possible.

Use **FL-300WW-5M-BD-24V** zig-zag tape: it bends sideways to follow the channel without twisting (8 mm strip in 10.5 mm channel, min. 3 cm radius). Fit the opal diffuser last.

INSTALLATION GUIDE

ORDERING INFORMATION

PART NUMBER
NL-AP-3311-2M-FLEX
Incl. silicone diffuser & end caps

FINISH ☐ Silver ☐ White ☐ Black

COVER Opal silicone (standard)

LENGTH ☐ 2 m std TOTAL _____ M

QTY _____ PO # _____

PROJECT _____

Specifications subject to change without notice.