DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

4714 Plaster-In Profile

PART NO. **NL-AP-4714-2M**



SPECIFICATIONS


APPLICATION	Plaster-in / drywall, flush
MATERIAL	T5 anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Silver
PC COVER	Frosted (included)
LED STRIP	1 line, up to 20 mm
INNER WIDTH	20.4 mm (23.52 mm opening)
DIMENSIONS	47 × 14 mm (flange W × H)
MOUNTING	Screws, then plaster over
ACCESSORIES	End caps NL-AP-4714-C

PRODUCT OVERVIEW

The 4714 is a **slim plaster-in aluminum channel** that houses LED strip lighting and provides a linear, uniform distribution of light. It mounts **flush** and is mudded into drywall, leaving only a clean line of light once plastered and painted.

CROSS SECTION

Dimensions in mm

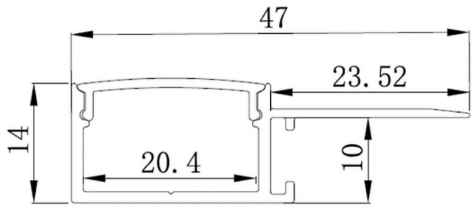

COMPONENTS



Aluminum Profile
2 m · silver



End Caps
NL-AP-4714-C QTY



PC Diffuser Cover
Frosted PC diffuser



PLASTER-IN INSTALLATION · APPLICATION

ORDERING INFORMATION

PART NUMBER — Includes PC cover
NL-AP-4714-2M

FINISH ☐ Silver (Only finish) | COVER Frosted (Included)

LENGTH ☐ 2 m std | TOTAL _____ M

QTY _____ | PO # _____

PROJECT _____

Specifications subject to change without notice.