DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

6114 Flexible Plaster-In

PART NO. **NL-AP-6114-2M-FLEX**



SPECIFICATIONS


APPLICATION	Curved ceilings & walls
MATERIAL	6063-T5 aluminum alloy
STANDARD LENGTH	2 m (0.5 – 3 m available)
PROFILE FINISH	Silver, Black or White
COVER	Opal silicone (included)
INTERNAL WIDTH	20.7 mm
DIMENSIONS	61.5 × 14 mm (W × H)
FORM FACTOR	Flexible / bendable

PRODUCT OVERVIEW

The 6114-FLEX is a **bendable, plaster-in** aluminum channel for curved ceilings, coves and walls. Once plastered in, the flange disappears and an **opal silicone cover** delivers a smooth, dot-free line of light that follows the curve.

CROSS SECTION

Dimensions in mm

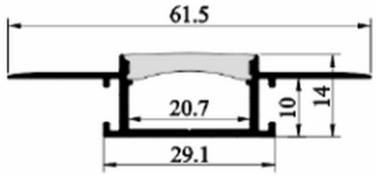

COMPONENTS & ACCESSORIES



Flexible Aluminum Profile

NL-AP-6114-2M-FLEX

2 m · silver, black, white

Opal Silicone Cover

Included

Diffused, flexible cover




End Caps

NL-AP-6114-C

Pair QTY

PLASTER-IN · FLUSH WITH CEILING OR WALL

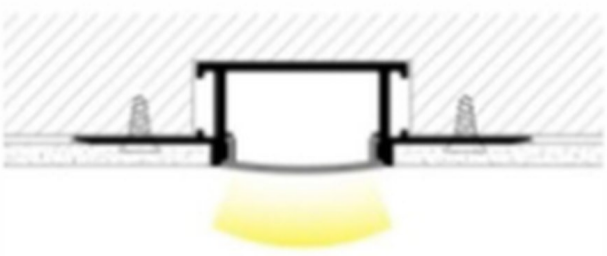

INSTALLATION · BENDS TO FOLLOW CURVED SURFACES

ORDERING INFORMATION

PART NUMBER — Includes silicone cover

NL-AP-6114-2M-FLEX

FINISH ☐ Silver ☐ Black ☐ White

COVER Opal silicone — Included

LENGTH ☐ 2 m std TOTAL ____ M

QTY ____ PO # ____

PROJECT ____

Specifications subject to change without notice.