DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

6532 Wide Body Recessed

PART NO. **NL-AP-6532-2M**



SPECIFICATIONS


APPLICATION	Recessed, surface or suspension
MATERIAL	AL6063-T5 anodized aluminum
STANDARD LENGTH	2 m (only length available)
PROFILE FINISH	Silver or Black
COVER	Frosted PC diffuser
LED STRIP	2 lines of LED strip (recommended)
DIMENSIONS	65 × 32 mm (flange W × H)
MOUNTING	Clips or steel-rope kit

PRODUCT OVERVIEW

The 6532 is a **recessed, wide-body aluminum profile** that sits flush in walls and ceilings, or can be surface or suspension mounted. Its 65 mm flange and 50 mm body house **two lines of LED strip** behind a frosted diffuser for a bold, uniform line of light with a clean, linear appearance.

CROSS SECTION

Dimensions in mm



COMPONENTS & ACCESSORIES



Aluminum Profile
NL-AP-6532-2M
2 m · silver or black



Frosted Cover
Included
Frosted PC diffuser



End Caps
NL-AP-6532-C
Closes profile ends



Mounting Clips
NL-AP-C6532
Metal clip, standard



Steel Rope Kit
NL-AP-R60-HK
Suspension mounting

ORDERING INFORMATION

PART NUMBER — Includes frosted cover

NL-AP-6532-2M

FINISH ☐ Silver ☐ Black COVER **Frosted**

LENGTH ☐ 2 m std TOTAL _____ M

QTY _____ PO # _____

PROJECT _____

ACCESSORIES · ORDER SEPARATELY

NL-AP-6532-C
End caps
QTY _____

NL-AP-C6532
Mounting clips
QTY _____

NL-AP-R60-HK
Steel rope suspension kit
QTY _____

Specifications subject to change without notice.

DayTech LED


5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com


LED ALUMINUM PROFILE · INSTALLATION

Installation Guide

PART NO. **NL-AP-6532-2M**

1 · RECESSED INSTALL WITH CLIPS (NL-AP-C6532)

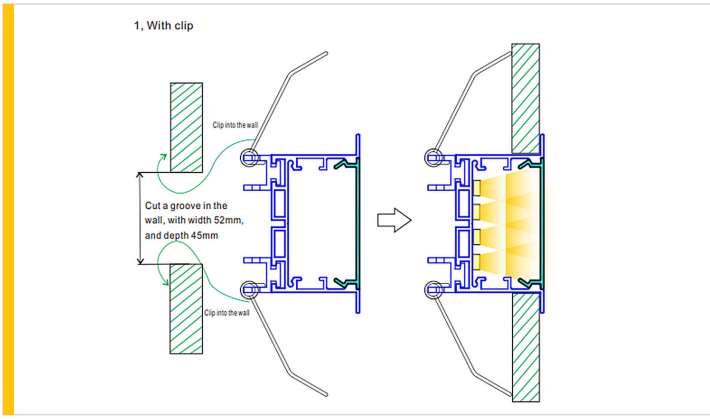

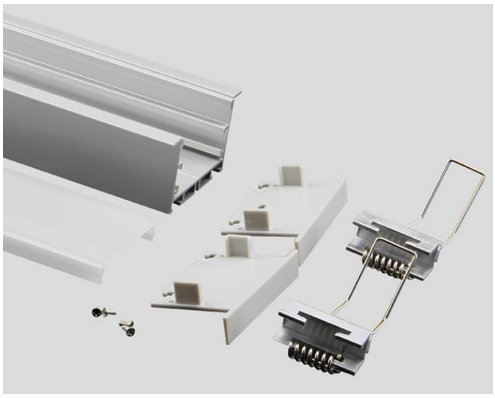


1. Cut a groove in the wall or ceiling 52 mm wide and 45 mm deep.
2. Fit the clips (NL-AP-C6532) to the profile, install 2 lines of LED strip and the frosted cover.
3. Fit the end caps (NL-AP-6532-C), then press the profile into the groove until the clips grip.

2 · SUSPENSION WITH STEEL ROPE (NL-AP-R60-HK)





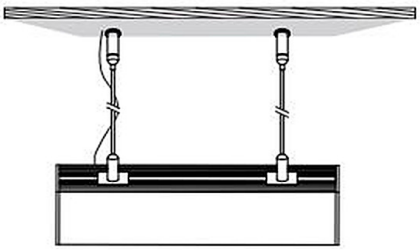

1. Steel rope kit: ceiling anchors, cables and profile joiners.
2. Slide the bottom joiner into the mounting clip and rotate it until it locks.
3. Fix the top joiner to the ceiling and adjust the cable to the required drop.

Specifications subject to change without notice.