DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

7532 Wide Body Profile

PART NO. **NL-AP-7532-2M**



SPECIFICATIONS


APPLICATION	Surface mount or suspension
MATERIAL	AL6063-T5 anodized aluminum
STANDARD LENGTH	2 m (only length available)
PROFILE FINISH	Silver
COVER	Frosted PC diffuser
LED STRIP	2 lines of LED strip (recommended)
DIMENSIONS	75 × 32 mm (W × H)
MOUNTING	Clips or steel-rope kit

PRODUCT OVERVIEW

The 7532 is a **wide-body aluminum profile** for surface or suspended installation. Its 75 mm body houses **two lines of LED strip** behind a frosted diffuser for a bold, uniform line of light with a clean, linear appearance.

CROSS SECTION

Dimensions in mm



COMPONENTS & ACCESSORIES



Aluminum Profile
NL-AP-7532-2M
2 m · silver



Frosted Cover
Included
Frosted PC diffuser



End Caps
NL-AP-7532-C
Closes profile ends



Mounting Clips
NL-AP-C7532
Metal clip, standard



Steel Rope Kit
NL-AP-R60-HK
Suspension mounting

ORDERING INFORMATION

PART NUMBER — Includes frosted cover

NL-AP-7532-2M

FINISH	☐ Silver	COVER	Frosted
LENGTH	☐ 2 m std	TOTAL	_____ M
QTY	_____	PO #	_____
PROJECT	_____		

ACCESSORIES · ORDER SEPARATELY

NL-AP-7532-C End caps	QTY	_____
NL-AP-C7532 Mounting clips	QTY	_____
NL-AP-R60-HK Steel rope suspension kit	QTY	_____

Specifications subject to change without notice.

DayTech LED


5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · INSTALLATION

Installation Guide

PART NO. **NL-AP-7532-2M**

1 · SURFACE MOUNT WITH CLIPS (NL-AP-C7532)

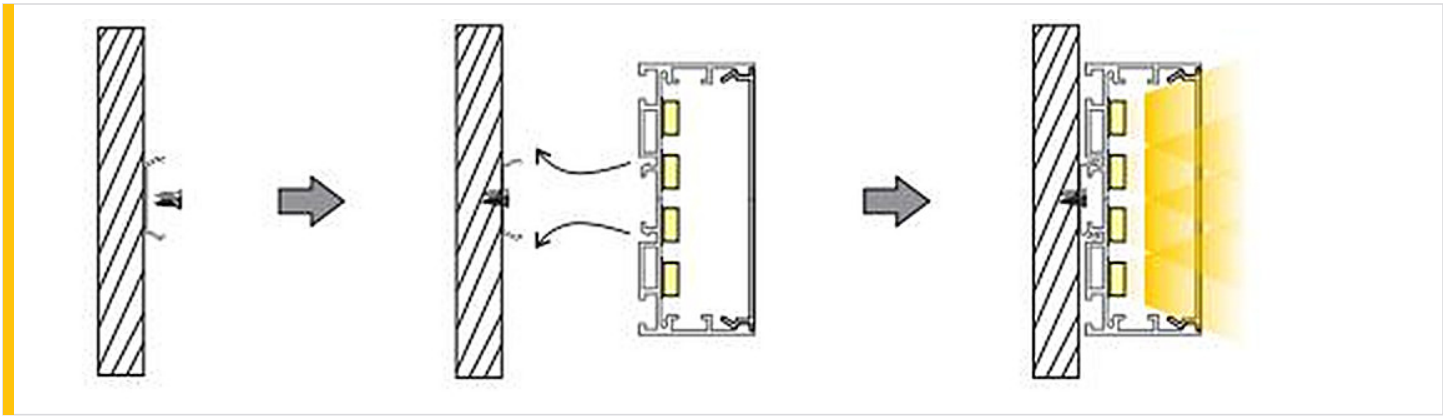


1. Screw the mounting clips to the surface, evenly spaced along the run.
2. Install the LED strip (2 lines recommended) and fit the frosted cover.
3. Fit the end caps (NL-AP-7532-C), then press the profile onto the clips until it snaps in.

2 · SUSPENSION WITH STEEL ROPE (NL-AP-R60-HK)





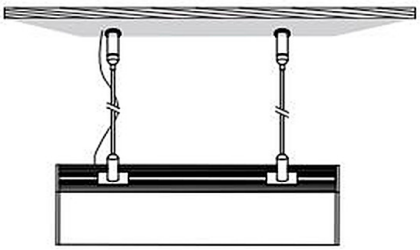

1. Steel rope kit: ceiling anchors, cables and profile joiners.
2. Slide the bottom joiner into the mounting clip and rotate it until it locks.
3. Fix the top joiner to the ceiling and adjust the cable to the required drop.

Specifications subject to change without notice.