DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

8016 Floor Kick Profile


PART NO. **NL-AP-8016-2M**

2 M · WHITE



CROSS SECTION

Dimensions in mm

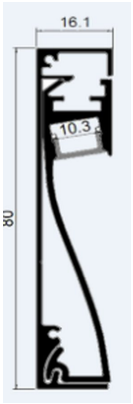

SPECIFICATIONS

APPLICATION	Floor kick / skirting light
MATERIAL	6063-T5 aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	White
PC COVER	Frosted (included)
LED STRIP	1 line, 8 mm wide max.
STRIP CHANNEL	10.3 mm
DIMENSIONS	16.1 × 80 mm (W × H)
MOUNTING	Screw clip to wall, click in
ACCESSORIES	End caps NL-AP-8016-C

PRODUCT OVERVIEW

The 8016 is a **floor kick (skirting) profile** that replaces a standard kick plate for a streamlined, finished look. It houses one line of LED strip **up to 8 mm wide** behind a frosted cover and gently washes the floor below. Best paired with an ambient strip like DayTech's **300 Series**.

COMPONENTS



Aluminum Profile
2 m · white



End Caps
NL-AP-8016-C QTY



PC Diffuser Cover
Frosted PC diffuser



APPLICATION · KITCHEN FLOOR KICK · INSTALLATION ON PAGE 2

ORDERING INFORMATION

PART NUMBER — Includes PC cover

NL-AP-8016-2M

FINISH	☐ White (Only finish)	COVER	Frosted (Included)
LENGTH	☐ 2 m std	TOTAL	_____ M
QTY	_____	PO #	_____
PROJECT	_____		

Specifications subject to change without notice.


DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

Installation Guide

PART NO. **NL-AP-8016-2M**

INSTALLATION

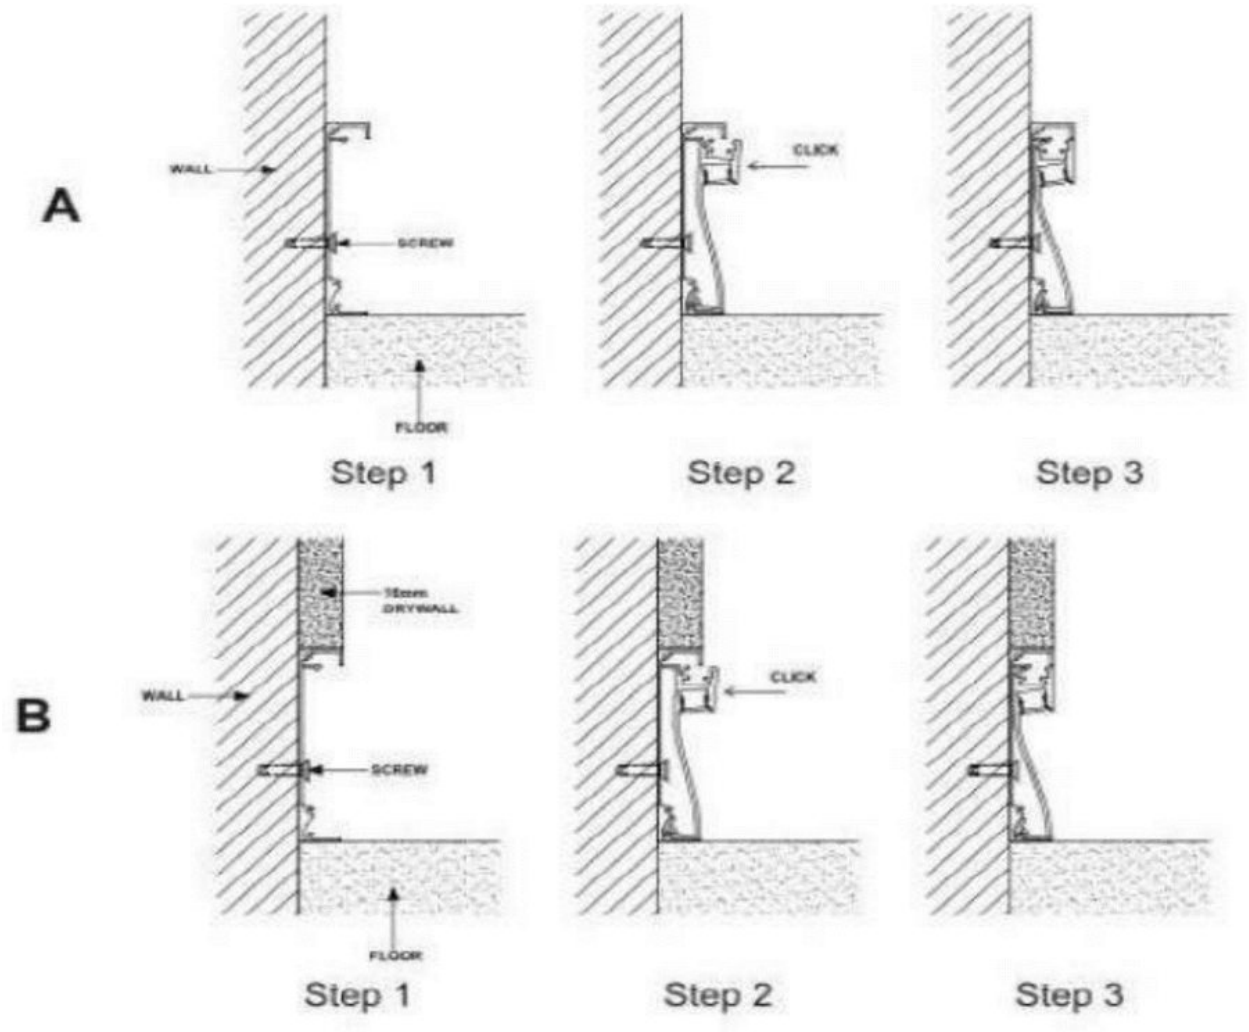

A · SURFACE ON WALL

1. Screw the mounting clip to the wall at floor level.
2. Click the profile onto the clip.
3. Install the LED strip (8 mm max.), cover and end caps.

B · FLUSH WITH 16 MM DRYWALL

1. Screw the clip to the wall below the drywall edge.
2. Click the profile in so it sits flush with the drywall.
3. Install the LED strip, cover and end caps.

Specifications subject to change without notice.