DayTech LED

5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · PRODUCT SPECIFICATION

9032 Wide Recessed Profile

PART NO. **NL-AP-9032-2M**



SPECIFICATIONS


APPLICATION	Recessed, surface or pendant
MATERIAL	AL6063-T5 anodized aluminum
STANDARD LENGTH	2 m
PROFILE FINISH	Silver
PC COVER	Frosted (included)
LED STRIP	2 lines · 65 mm inner
DIMENSIONS	75 × 32 mm, 90 mm flange
CUT-OUT	77 mm wide × 45 mm deep

PRODUCT OVERVIEW

The 9032 is a **wide-body aluminum profile** that houses **two lines of LED strip** for a uniform, linear light with a prominent, bold shape. It can be **recessed** with spring clips, **surface** mounted with clips, or **suspended** with the pendant hanging kit.

CROSS SECTION

Dimensions in mm



COMPONENTS & ACCESSORIES



Aluminum Profile
NL-AP-9032-2M
2 m · silver



End Caps
NL-AP-9032-C
Pair QTY



Surface Clip
NL-AP-C9032
Surface mount QTY



Spring Clip
NL-AP-C9032-SC
Recessed QTY



Pendant Kit
NL-AP-R60-HK
Hanging kit QTY



MOUNTING OPTIONS & INSTALLATION ON PAGE 2

ORDERING INFORMATION

PART NUMBER — Includes PC cover

NL-AP-9032-2M

FINISH ☐ Silver (Only finish) | COVER Frosted (Included)

LENGTH ☐ 2 m std | TOTAL ____ M

QTY ____ | PO # ____

PROJECT ____

Specifications subject to change without notice.


DayTech LED
5250 Satellite Drive, Unit 7, Mississauga ON L4W 5G5
Tel 905-617-0298
www.daytechled.com

LED ALUMINUM PROFILE · INSTALLATION


Mounting & Installation

PART NO. **NL-AP-9032-2M**

RECESSED · SPRING CLIPS (NL-AP-C9032-SC)

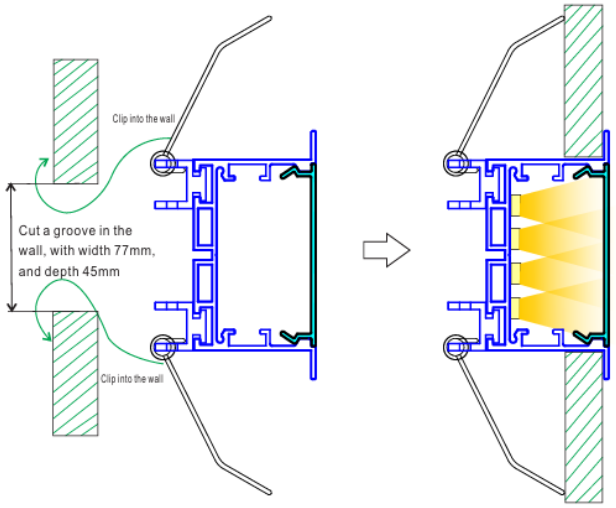

KIT CONTENTS

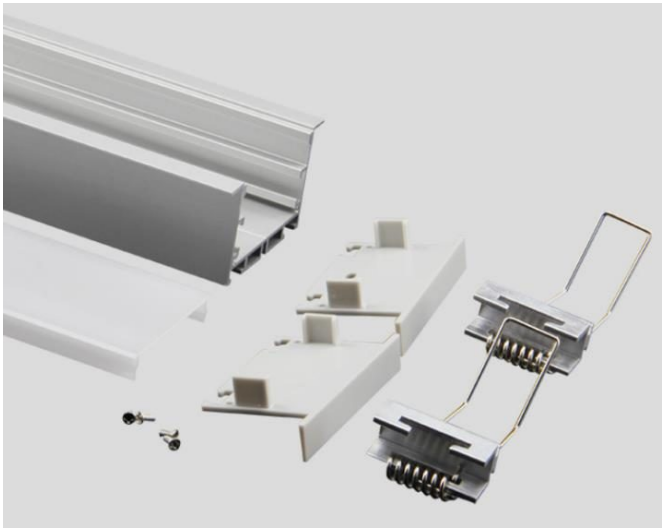

RECESSED · NL-AP-C9032-SC

1. Cut a groove 77 mm wide and 45 mm deep.
2. Attach the spring clips to the profile.
3. Press the profile into the groove until the flange sits flush.



SURFACE · NL-AP-C9032

1. Screw the mounting clips to the surface, evenly spaced.
2. Install the LED strip, cover and end caps.
3. Press the profile into the clips.



PENDANT · NL-AP-R60-HK

1. Fix the ceiling anchors and cable holders.
2. Attach the cable grips to the profile.
3. Adjust the cable length to level the profile.



Specifications subject to change without notice.